



## Filter Vessels (Cartridge Style) - Model VFL


FILTER VESSELS (CARTRIDGE STYLE): **Filtervac** offers A.S.M.E. Code designed cartridge filter housings for a variety of liquid filtration applications. .



Cartridge Style Vessel  
(Model VFL-6036-1-2-150)

### Standard Features:

- Designed to accept one(1) filter element with the following dimensions:  
O.D. 6.00" I.D. 2.63" LG. 18.00" (Model VFL-6018) or  
O.D. 6.00" I.D. 2.63" LG. 36.00" (Model VFL-6036)
- Designed for operating pressure of 150PSI
- Vessel Construction - Carbon Steel
- Differential Pressure Connections
- 2" NPT Inlet/Outlet Connection
- 3/4 " Drain and 1/2" Vent Connections
- Buna-N O-Ring
- Swing Bolt Closure is provided for the vessel's lid. In addition the vessel's lid comes with unique pop-up spring loaded and pivot design that allows for easy and convenient filter cartridge removal/installation.
- **New Feature:** One(1) piece (ie. no bolts or washers utilized) filter hold down assembly. Filter Hold Down Assembly comes with handles that threads into stand pipe and has a machined knife edge which ensures positive seal.
- All Filter Housings are externally and internally sandblasted. Exterior finish of vessel is comprised of one coat of primer and one coat of bright blue enamel.

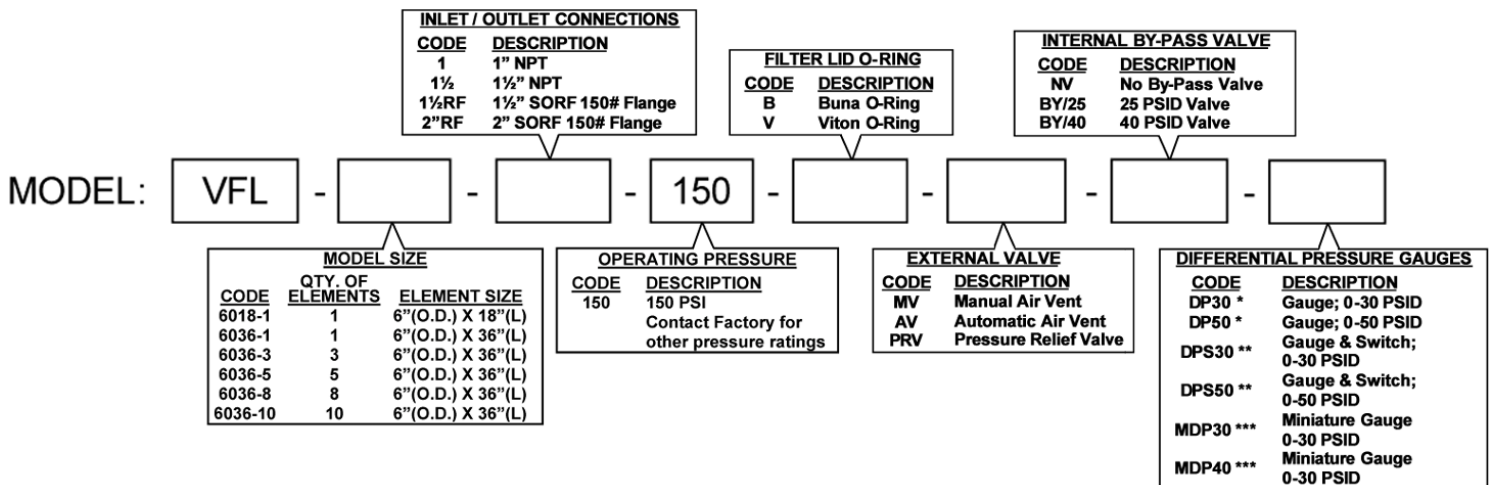

Internal By -Pass Valve  
(Option BY/25 & BY40)



Differential Pressure Gauge & Switch  
(Option DPS30 & DPS50)



Differential Pressure Gauge  
(Option DP30 & DP50)



Miniature Differential Pressure Gauge  
(Option MDP30 & MDP40)